



JMS

Nominal Width

PCD

Bore Diameter

Nominal Diameter

Bead Seat Diameter


Offset - Set

SECTION C-C

Half Dual Spacing

www.jamak.com.tr

JAMAK WHEELS

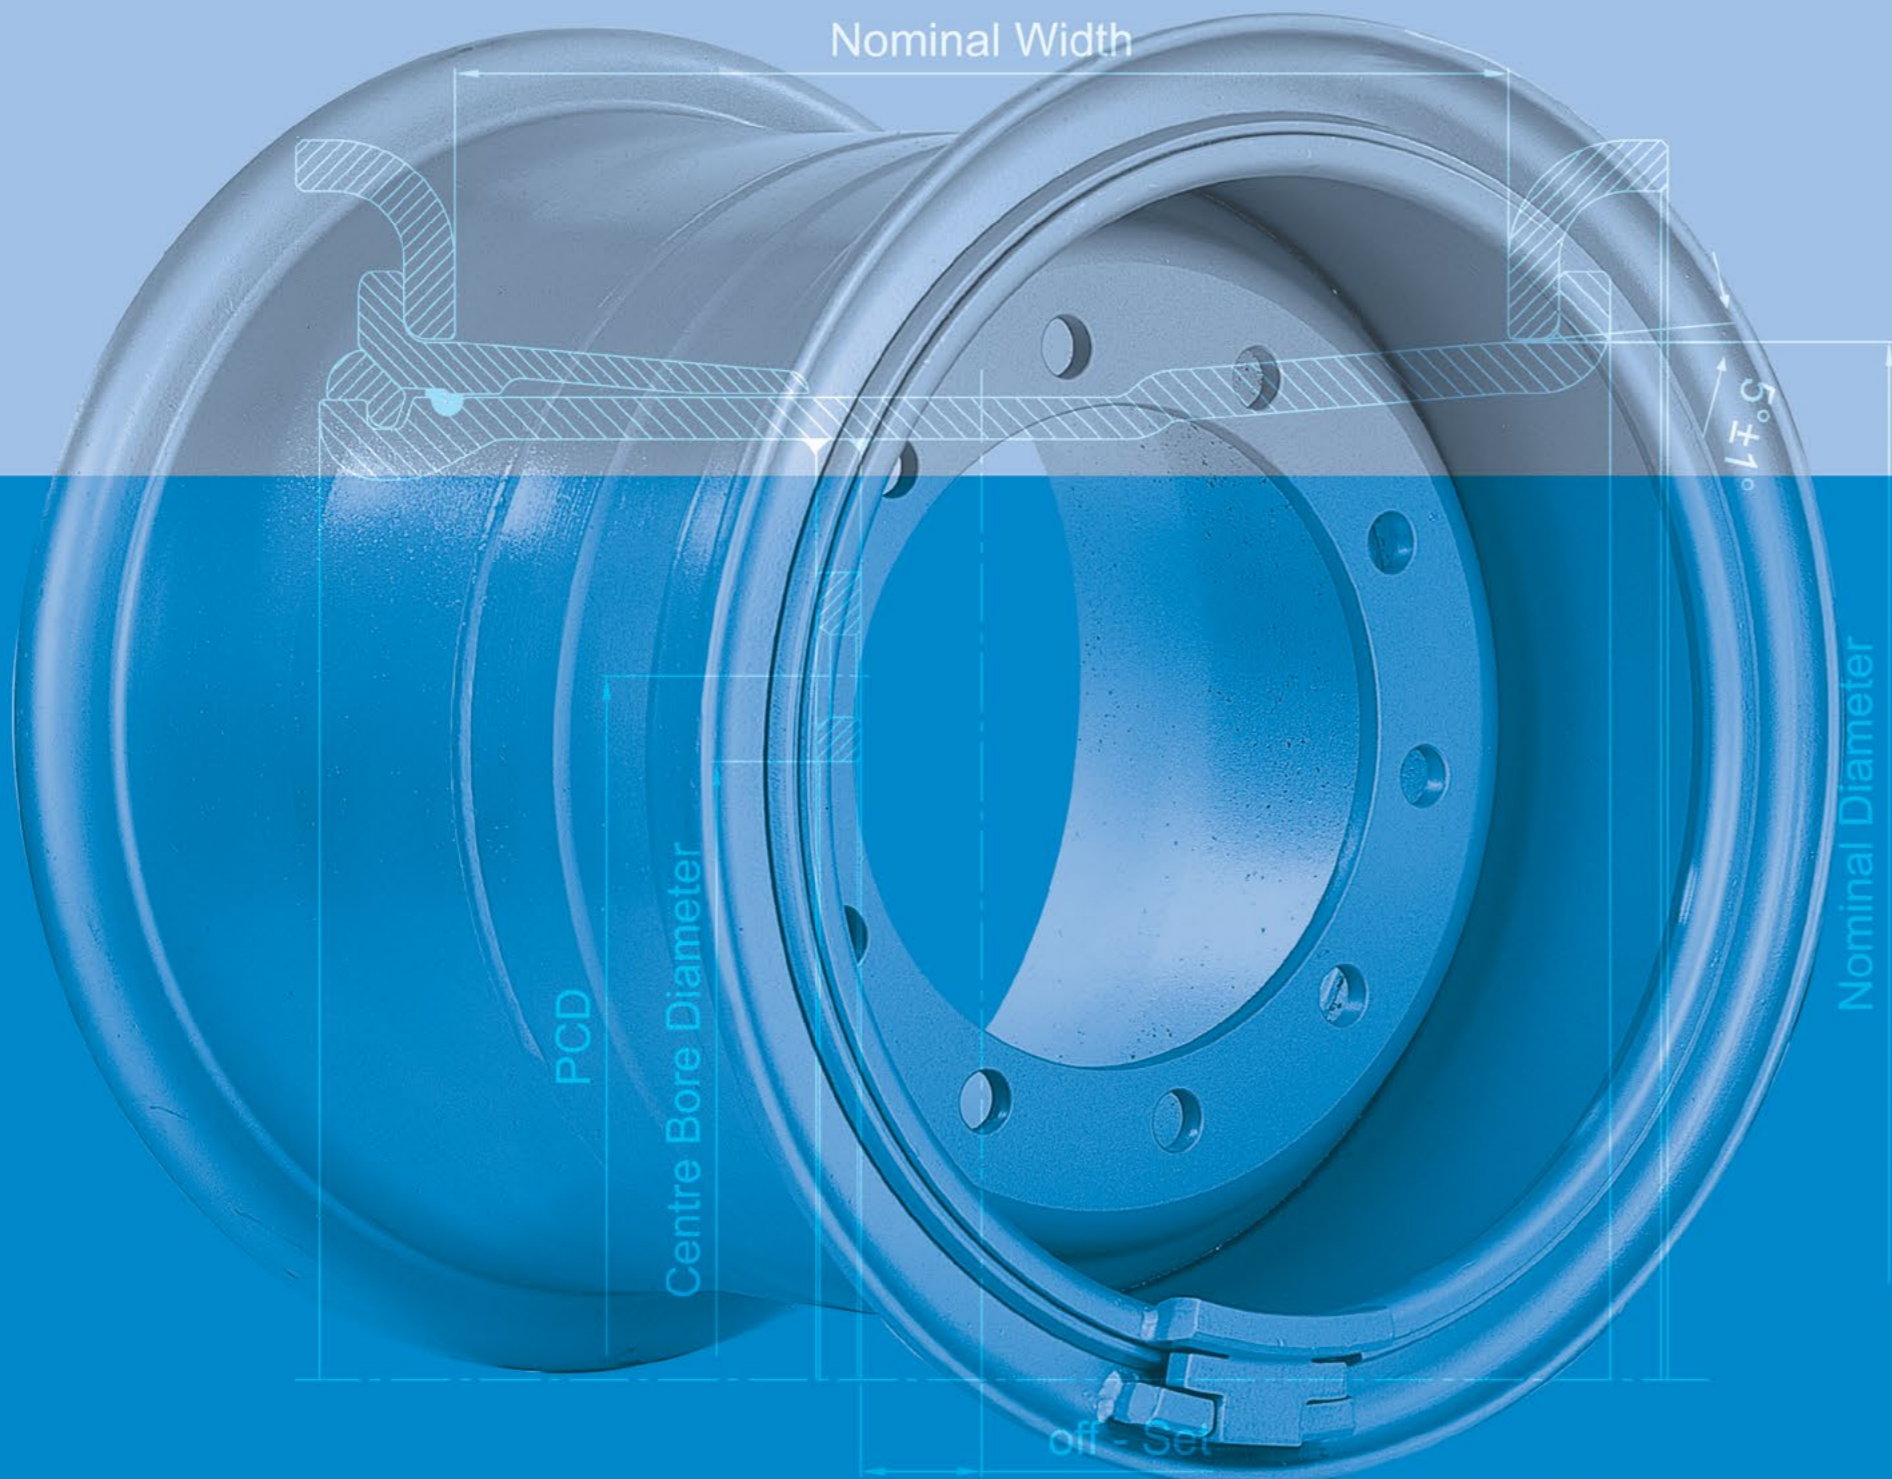

JMS



JMS



JMS Machinery Industry and Trade Inc. which is among the leading heavy-type industrial wheel manufacturers of the world was established as JAMAK brand in 1978. Having producing different types of truck and off-road wheels with industrial wheels range, the company launches new products according to market needs continuously. Being one of the leading companies in industrial wheel sector, JMS offers costume made products in addition to its wide range of products with quality approach.


JMS is one of the exclusive companies of the world, using 'flow forming' technology in production and became the benchmark of quality and reliability of the wheel sector with its long experience and technological advantage. The company attains prestigious position in wheel sector by providing excellent products to the worldwide costumers and fulfilling even the most particular demands of costumers.

90% export rate is consequence of 25 years of experience and good reputation in sector. JMS's export has increased consistently while growing on all continents, Europe and America in particular.

Growth trend will continue by improvements, new investments and higher costumers satisfaction rate. ISO 9001-2000 Quality System certificate has been obtained in accordance with continuous development approach and the system is constantly developed.

Behind the JMS's success there is enthusiastic efforts of our productive employees dedicated to the constant improvement, where all manufacturing stage from the raw material to final product is operated precisely. Employee's individual personality, team work and exquisite harmony is reflected as high quality products and services; which also create peace of mind for costumers and environment by cooperating with our company.

JMS is looking into its bright future in confidence together with costumers, while growing in the world by new investments, high quality level, production capacity and product range.

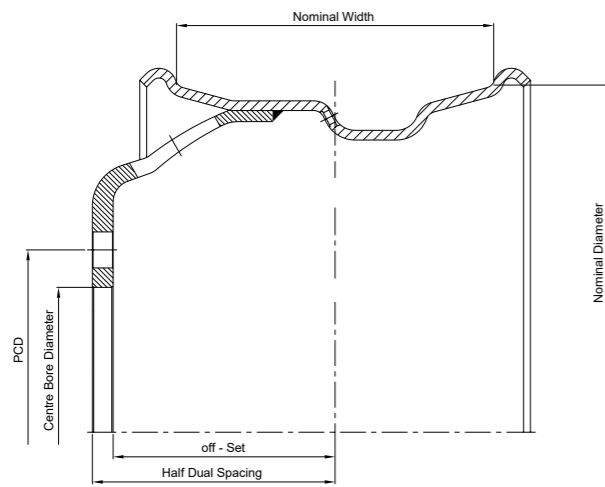

17.5x6.00 WHEELS

Recommended tyre size 8 R 17.5 , 8.5 R 17.5 , 205/75R17.5 , 215/75R17.5

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
673 24K.00	164	222,25	6	B5	117	127	24
679 24J.00	146	203,2	5	B5	116	126	24
679 24S.00	150	208	5	B5	110	120	24
679 24T.00	150	203,2	5	Ø32,5 / R22	110	122	26
679 94J.00	146	203,2	5	B32	116	126	24

17.5x6.75 WHEELS

Recommended Tyre Size 9.5 R 17.5, 225/70R17.5, 225/75R17.5, 235/75R17.5

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
689 9B9.00	176	225	10	Ø24/1x45°	130	140	--
689 96R.00	176	225	10	Ø26/Ø32/R18	123	135	--
689 6VJ.00	176	225	10	Ø26/1x45°	55	--	--
689 9ZN.00	164	222,25	6	Ø32,5/Ø37/R22,2	63,5	--	--
689 3BF.00	176	225	10	Ø27/Ø32/1x45°	128	140	--

19.5x6.75 WHEELS

Recommended Tyre Size 225/70R19.5

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
6B2 6B4.00	221	275	8	Ø26/1x45°	140	152	--
6B2 6BF.00	221	275	8	Ø26/1x45°	128	140	--
6B2 92N.00	221	275	8	Ø24/1x45°	133	145	--
6B9 52N.00	164	222,25	6	Ø32,5/Ø37/R22,2	133	145	--



19.5x7.5 WHEELS

Recommended Tyre Size 9.5 R 19.5, 10 R 19.5, 11 R 19.5, 245/70R19.5, 265/70R19.5

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
722 956.00	221	275	8	Ø24/1x45°	143	155	--
723 9V3.00	161	205	6	Ø21,5/Ø27/R16	20	--	--
722 656.00	221	275	8	Ø26/1x45°	143	155	--
721 3ZE.00	281	335	10	Ø27/Ø32/R18	135,5	145,5	--
722 62L.00	221	275	8	Ø26/1x45°	141	153,5	35,3

19.5x8.25 WHEELS

Recommended Tyre Size 265/55 R19.5, 285/75 R19.5, 285/70 R19.5

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
8P9 6VK.00	176	225	10	Ø26/1x45°	66	--	--
8P9 655.00	176	225	10	Ø26/1x45°	153	165	--
8P2 9ZY.00	221	275	8	Ø26/Ø32/R18	148	160	35,5
8P9 6UG.00	176	225	10	Ø26/1x45°	50	--	32,2

22.5x7.50 WHEELS

Recommended tyre size 10 R 22.5 , 255/70R22.5

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
771 686.00	281	335	10	Ø26 / 1x45°	106	120	46
772 63E.00	221	275	8	Ø26 / 1x45°	55	--	46
772 92L.00	221	275	8	Ø24 / 1x45°	141,5	153,5	46
778 22M.00	221	285,8	8	B5	148	162	46

22.5x8.25 WHEELS

Recommended tyre size 11 R 22.5 , 265/60R22.5 , 275/70R22.5 , 285/70R22.5 , 275/80R22.5

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
821 673.00	281	335	10	Ø26 / 1x45°	151	165	47
821 686.00	281	335	10	Ø26 / 1x45°	106	--	47
821 773.00	281	335	10	B3	151	165	47



22.5x9.00 WHEELS


Recommended tyre size 12 R 22.5, 285/60R22.5, 295/60R22.5, 305/70R22.5, 315/70R22.5, 315/75R22.5, 295/80R22.5, 315/80R22.5

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
921 62U.00	281	335	10	Ø26 / 1x45°	147	161	48
921 661.00	281	335	10	Ø26 / 1x45°	161	175	48
921 686.00	281	335	10	Ø26 / 1x45°	106	--	48
921 761.00	281	335	10	B3	161	175	48
922 62T.00	221	275	8	Ø26 / 1x45°	60	--	48
923 51A.00	161	205	6	Ø26 / 1x45°	116	144	48

22.5x11.75 WHEELS

Recommended tyre size 355/50R22.5 - 385/65R22.5

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
171 63Z.00	281	335	10	Ø26 / 1x45°	119	--	53
171 640.00	281	335	10	Ø26 / 1x45°	0	--	53
171 740.00	281	335	10	B3	0	--	53

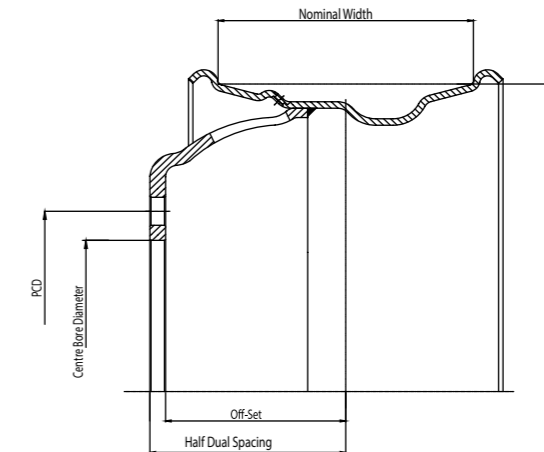

17.5x6.75 ALV WHEELS

Recommended Tyre Size 9.5 R 17.5, 225/70R17.5, 225/75R17.5, 235/75R17.5

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
A69 6ZS.00	176	225	10	Ø26/1x45°	131	142	--
A63 920.00	161	205	6	Ø21.5/Ø27/R16	0	--	--

22.5x8.25 ALV WHEELS

Recommended Tyre Size 11 R 22.5, 265/60R22.5, 275/70R22.5, 285/70R22.5, 275/80R22.5

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
A81 66N.00	281	335	10	Ø26x1x45°	159	175	--
A81 63M.00	281	335	10	Ø26x1x45°	155	168	--
A81 648.00	281	335	10	Ø26x1x45°	151	164	47.6

22.5x9.00 ALV WHEELS


Recommended Tyre Size 12 R22.5, 285/60R22.5, 295/60R22.5, 305/70R22.5, 305/70R22.5, 315/70R22.5, 315/75R22.5, 295/80R22.5, 315/80R22.5

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
A91 6UY.00	281	335	10	Ø26/1x45°	161	175	45.6
A91 661.00	281	335	10	Ø26/1x45°	161	175	45.5

22.5x11.75 ALV WHEELS

Recommended Tyre Size 355/50 R22.5, 385/65 R22.5, 365/70 R22.5, 375/90 R22.5

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
1Y2 7K6.00	221	275	8	Ø27/Ø32/R18	120	--	--
1Y1 9V2.00	281	335	10	Ø27/Ø32/R12.4	75	--	--
1Y1 6K6.01	281	335	10	Ø26/1x45°	120	--	--
1Y1 6ZA.00	281	335	10	Ø26/1x45°	135	--	45.8
1Y9 9FE.00	261	300	10	Ø24/Ø32/R18	-8	--	61.4

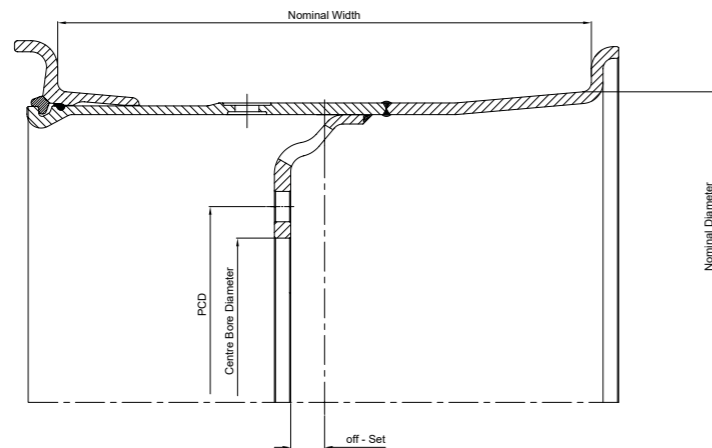


18 TL 21 WHEELS

Recommended tyre size 24 R 21

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
181 686.00	281	335	10	Ø26 / 1x45°	120	--	81
181 687.00	281	335	10	Ø26 / 1x45°	0	--	81
181 603.00	281	335	10	Ø26 / 1x45°	29	--	81

- can be used for pneumatic tyres only
- delivered without O-ring

24" SINGLE PIECES TUBELESS WHEELS

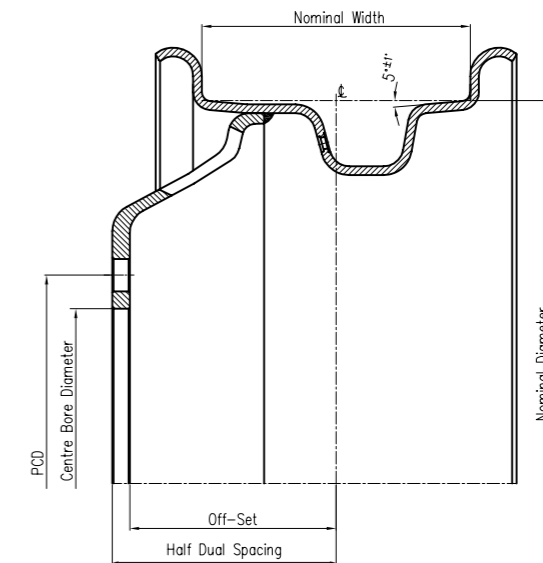


8.5x24" WHEELS

Recommended tyre size 12.00 R 24

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
8T1 664.00	Ø281	Ø335	10	Ø26 / 1x45°	166	180	--


24" TUBELESS WHEELS WITH 3 PCS

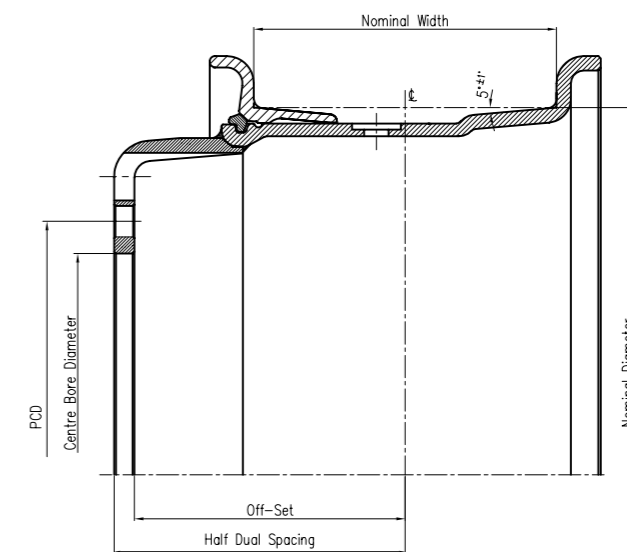

10.00-24 WHEELS

Recommended tyre size 13.00 R 24, 14.00 R 24, 385/95 R 24, 17/80 R 24

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
1T9 6TU.00	Ø371	Ø425	12	Ø26 / 1x45°	228	245	--
1T2 92A.00	Ø221	Ø275	8	Ø26 / 1x45°	0	--	--
1T9 698.00	Ø371	Ø425	12	Ø26 / 1x45°	207	225	--

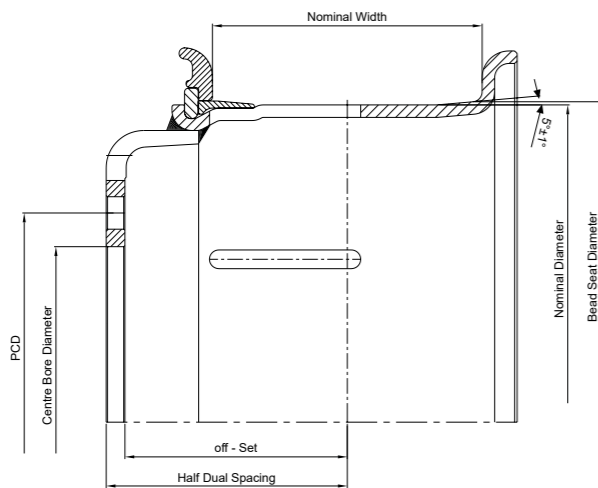

6.0-20 HD WHEELS

Recommended tyre size 7.50 - 20 , 7.50 R 20 , 7.50 - 20 EM

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
619 912.00	301	350	16	Ø13 / 1x45°	-36	--	46

6.5-20 HD WHEELS

Recommended tyre size 8.25 - 20 , 8.25 R 20 , 8.25- 20 EM

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
661 377.00	281	335	10	A3	94	109	43
661 665.00	281	335	10	Ø26 / 1x45°	149	162	52

7.5-20 HD WHEELS

Recommended tyre size 10.00 - 20 , 10.00 R 20 , 10.00- 20 EM

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
761 648.00	281	335	10	Ø26 1x45°	152	165	59

- can be used for solid and pneumatic tyres
- air pressure 10 bar or 145 PSI



8.0-20 HD WHEELS

Recommended tyre size 11.00 - 20 , 11.00 R 20 , 11.00- 20 EM

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
811 35P.00	281	335	10	A3	-20	--	64
811 645.00	281	335	10	Ø26 / 1x45°	167	180	63
811 649.00	281	335	10	Ø26 / 1x45°	174	187	60
811 65B.00	281	335	10	Ø26 / 1x45°	159	174	65
811 663.00	281	335	10	Ø26 / 1x45°	160	174	64
811 665.00	281	335	10	Ø26 / 1x45°	149	162	60
811 667.00	281	335	10	Ø26 / 1x45°	158	172	62
811 746.00	281	335	10	B3	159	172	61
811 74H.00	281	335	10	B3	0	--	64
811 648.00	281	335	10	Ø26 / 1x45°	152	165	60
811 64C.00	281	335	10	Ø26 / 1x45°	150	165	64
811 64M.00	281	335	10	Ø26 / 1x45°	83	--	64
811 685.00	281	335	10	Ø26 / 1x45°	172	187	65
811 936.00	281	335	10	A53	-37,7	--	58
819 645.00	325	381	12	Ø26 / 1x45°	167	180	60
819 649.00	325	381	12	Ø26 / 1x45°	174	187	60
819 685.00	325	381	12	Ø26 / 1x45°	172	187	65
819 974.00	343	400	12	Ø20 / 1x45°	-20	--	63



8.5-20 HD WHEELS

Recommended tyre size 12.00 - 20 , 12.00 R 20 , 12.00- 20 EM

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%	
861 610.00	281	335	10	Ø26 / 1x45°	172	188	77	***
861 611.00	281	335	10	Ø26 / 1x45°	178	193	68	
861 62B.00	281	335	10	Ø26 / 1x45°	149	165	75	
861 62C.00	281	335	10	Ø26 / 1x45°	170	186	75	
861 646.00	281	335	10	Ø26 / 1x45°	159	172	65	
861 64M.00	281	335	10	Ø26 / 1x45°	83	--	67,5	
861 64U.00	281	335	10	Ø26 / 1x45°	160	175	67,5	
861 662.00	281	335	10	Ø26 / 1x45°	0	--	63	
861 666.00	281	335	10	Ø26 / 1x45°	174	189	74	**
861 668.00	281	335	10	Ø26 / 1x45°	161	176	66	**
861 672.00	281	335	10	Ø26 / 1x45°	162	177	64	***
861 676.00	281	335	10	Ø26 / 1x45°	190	205	71	
861 678.00	281	335	10	Ø26 / 1x45°	158	173	67	
861 685.00	281	335	10	Ø26 / 1x45°	172	187	72	***
861 688.00	281	335	10	Ø26 / 1x45°	175,5	189,5	65	
861 746.00	281	335	10	B3	159	172	64	
861 785.00	281	335	10	B3	173	188	68	
861 849.00	281	335	10	Ø26 80°	169	182	68	
861 949.00	281	335	10	Ø23 / 1x45°	169	182	68	
861 969.00	281	335	10	Ø23 / 1x45°	90	--	64	**
861 975.00	281	335	10	Ø25.4 / R18	-11,5	--	65	
869 25J.00	222	275	12	B5	-65	--	70	
869 32A.00	371	425	12	A3	0	--	75	
869 34E.00	371	425	12	A3	55	--	75	
869 647.00	176	225	10	Ø26 / 1x45°	0	--	64	
869 666.00	325	381	12	Ø26 / 1x45°	174	189	69	**
869 676.00	325	381	12	Ø26 / 1x45°	190	205	70	

** with Ø16 reinforcement ring
*** with 20x20 reinforcement ring



10.0-20 HD WHEELS

Recommended tyre size 14.00 - 20 , 14.00 R 20 , 14.00- 20 EM

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
101 61P.00	281	335	10	Ø26 / 1x45°	145	--	86
101 61Z.00	281	335	10	Ø26 / 1x45°	125	--	86
101 62C.00	281	335	10	Ø26 / 1x45°	169	185	88
101 659.00	281	335	10	Ø26 / 1x45°	161	--	86
101 65G.00	281	335	10	Ø26 / 1x45°	189	204	88
101 672.00	281	335	10	Ø26 / 1x45°	163	--	88
101 691.00	281	335	10	Ø26 / 1x45°	182	198	88
101 692.00	281	335	10	Ø26 / 1x45°	166,7	183	88
101 693.00	281	335	10	Ø26 / 1x45°	174,2	190,5	88
101 694.00	281	335	10	Ø26 / 1x45°	191,3	175	88
101 716.00	281	335	10	B3	165	--	88
101 917.00	281	335	10	Ø20.6 / 1x45°	12,7	--	98
101 91P.00	281	335	10	A3	145	--	86
109 51E.00	239	304,8	14	Ø21 / 1x45°	180,5	193,5	88
109 604.00	284	335	10	Ø26 / 1x45°	216	229	88
109 65G.00	325	381	12	Ø26 / 1x45°	189	204	88
109 65L.00	281,2	335	10	Ø26 / 1x45°	38	--	88
109 65M.00	280,2	335	10	Ø26 / 1x45°	65	--	88
109 91G.00	270	335	10	Ø30 / 1,5x45°	51	--	94
109 91T.00	215	286	10	A53	-75,5	--	95



8.5-24 HD WHEELS

Recommended tyre size 12.00 - 24 , 12.00 R 24 , 12.00- 24 EM

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%	
831 609.00	281	335	10	Ø26 / 1x45°	20	--	110	*
831 64M.00	281	335	10	Ø26 / 1x45°	83	--	110	
831 64N.00	281	335	10	Ø26 / 1x45°	180	195	110	
831 664.00	281	335	10	Ø26 / 1x45°	166	180	110	
831 678.00	281	335	10	Ø26 / 1x45°	157	172	110	
831 689.00	281	335	10	Ø26 / 1x45°	158	176	95	*
831 72D.00	281	335	10	B3	154	172	113	
831 799.00	281	335	10	B3	173	190	105	
831 990.00	281	335	10	Ø23 / 1x45°	93	--	92	*
839 608.00	371	425	24	Ø26 / 1x45°	177	195	103	
839 613.01	371	425	24	Ø26 / 1x45°	172	190	113	*
839 614.00	371	425	24	Ø26 / 1x45°	154	172	98	
839 62Z.00	371	425	24	Ø26 / 1x45°	164	178	96	
839 63H.00	371	425	24	Ø26 / 1x45°	163	180	97	
839 63J.00	371	425	24	Ø26 / 1x45°	155	172	100	
839 666.00	371	425	12	Ø26 / 1x45°	176	190	96	
839 679.00	371	425	12	Ø26 / 1x45°	60	--	90	
839 688.00	371	425	12	Ø26 / 1x45°	173	187	95	
839 689.00	371	425	12	Ø26 / 1x45°	158	176	112	*
839 699.00	371	425	12	Ø26 / 1x45°	172	190	101	
879 666.00	371	425	12	Ø26 / 1x45°	176	190	97	

* with Ø26 reinforcement ring




10.0-24 HD WHEELS

Recommended tyre size 14.00 - 24 , 14.00 R 24 , 14.00- 24 EM

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%	
141 682.00	281	335	10	Ø26 / 1x45°	0	--	110	
141 696.00	281	335	10	Ø26 / 1x45°	199	215	116	
141 91S.00	281	335	10	Ø25,4 / R18	-63,5	--	115	
149 383.00	371	425	12	A3	207	225	116	
149 384.00	370	425	12	A3	-49	--	107	
149 395.00	371	425	12	A3	-129	--	107	*
149 596.00	280,5	394	20	Ø21 / 1x45°	200	216	121	*
149 608.00	281	335	20	Ø26 / 1x45°	177	195	125	
149 613.00	371	425	24	Ø26 / 1x45°	167	185	118	*
149 63C.00	371	425	24	Ø26 / 1x45°	199	216	116	**
149 63D.00	371	425	24	Ø26 / 1x45°	198	216	126	*
149 64L.00	371	425	12	Ø26 / 1x45°	90	--	115	
149 65D.00	371	425	24	Ø26 / 1x45°	192	210	126	*
149 666.00	371	425	12	Ø26 / 1x45°	174,5	190	107	
149 670.00	371	425	24	Ø26 / 1x45°	207	225	129	
149 680.00	371	425	12	Ø26 / 1x45°	210	225	112	
149 697.00	371	425	12	Ø26 / 1x45°	208,5	222,5	110	*
149 698.00	371	425	24	Ø26 / 1x45°	207	225	118	
149 699.00	371	425	24	Ø26 / 1x45°	177	195	125	
149 73U.00	371	425	12	B3	197	214	118	
149 91D.00	270	335	10	Ø30 / 1,5x45°	48	--	110	
149 970.00	350,2	400	16	Ø24 / 1x45°	207	225	110	

* with Ø26 reinforcement ring
** with Ø16 reinforcement ring

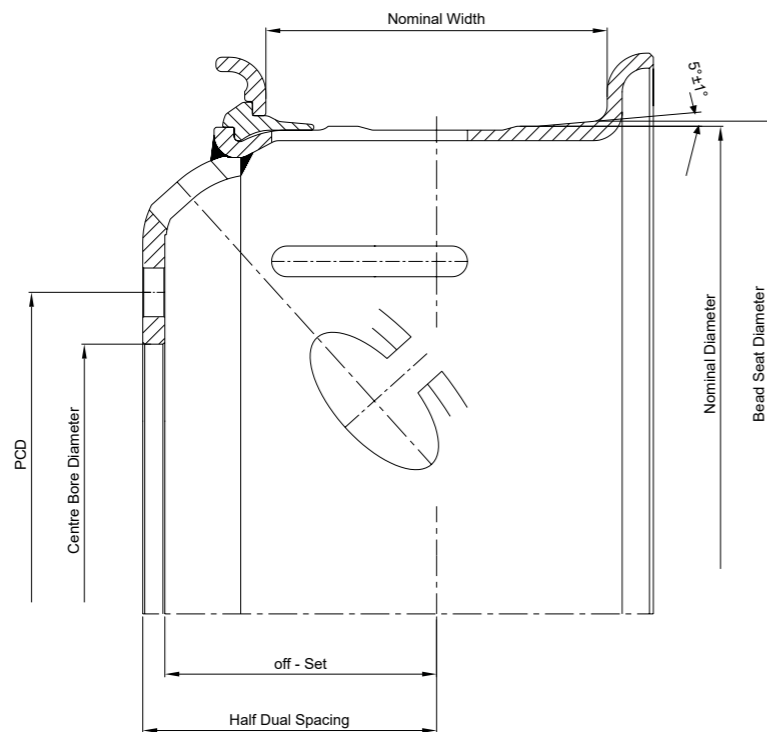

6.5-20 WHEELS

Recommended tyre size 8.25 - 20 , 8.25 R 20 , 8.25- 20 EM

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
651 421.00	281	335	10	B17	137	148	46
651 665.00	281	335	10	Ø26 / 1x45°	149	162	46
652 421.00	221	275	8	B17	137	148	47
652 92N.00	221	275	8	Ø27 / 2x45°	133	145	47
652 930.00	221	275	8	Ø25 / R18	162,5	174	59
652 933.00	221	275	8	Ø25 / R18	85	--	44

- dual discs with and without hand and ventilation holes
- air pressure 9 Bar or 130 PSI



7.0-20 WHEELS

Recommended tyre size 9.00 - 20 , 9.00 R 20 , 9.00- 20 EM

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
701 422.00	281	335	10	B17	141,4	152,4	48
701 619.00	281	335	10	Ø26 / 1x45°	138	148	47
701 622.00	281	335	10	Ø26 / 1x45°	142	153	48
701 627.00	281	335	10	Ø26 / 1x45°	149	160	48
701 62S.00	281	335	10	Ø26 / 1x45°	98	--	50
701 634.00	281	335	10	Ø26 / 1x45°	168	180	50
701 63B.00	281	335	10	Ø26 / 1x45°	118	130	46
701 655.00	281	335	10	Ø26 / 1x45°	153	165	48
701 65K.00	281	335	10	Ø26 / 1x45°	165	177	50
701 956.00	281	335	10	Ø27 / 2x45°	144	156	46
702 422.00	221	275	8	B17	142	153	48
702 722.00	221	275	8	B3	142	153	48
708 222.00	221	285	8	B5	142	153	48
708 22L.00	221	285	8	B5	140,5	153	50
708 232.00	221	285	8	B5	151	162	49
709 202.00	281	335	8	B5	30	--	46
709 215.00	340	390	10	B5	144	155	47
709 53N.00	352	406	10	Ø21 / 1x45°	31	--	49
709 540.00	352	406	10	Ø21 / 1x45°	0	--	48



7.5-20 WHEELS

Recommended tyre size 10.00 - 20 , 10.00 R 20 , 10.00- 20 EM

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
751 423.00	281	335	10	B17	154	165	50
751 433.00	281	335	10	B17	152,5	165	50
751 439.00	281	335	10	B17	153	165	50
751 456.00	281	335	10	B17	143	155	48
751 61K.00	281	335	10	Ø26 / 0,5x45°	154	166	49
751 623.00	281	335	10	Ø26 / 1x45°	154	165	49
751 627.00	281	335	10	Ø26 / 1x45°	149	160	48
751 62G.00	281	335	10	Ø26 / 0,5x45°	139	151	48
751 640.00	281	335	10	Ø26 / 1x45°	0	--	50
751 642.00	281	335	10	Ø26 / 1x45°	149	162	48
751 648.00	281	335	10	Ø26 / 1x45°	151	164	49
751 64B.00	281	335	10	Ø26 / 0,5x45°	152	165	50
751 64P.00	281	335	10	Ø26 / 1x45°	147	160	50
751 655.00	281	335	10	Ø26 / 1x45°	153	165	50
751 731.00	281	335	10	B3	155	166	49
751 743.00	281	335	10	B3	162	175	51
751 744.00	281	335	10	B3	130	143	49
751 855.00	281	335	10	B17	154	166,5	46
752 707.00	221	275	8	B3	200	212	54
752 723.00	221	275	8	B3	156	167	46
752 75E.00	221	275	8	B3	155	167	50
753 907.00	161	205	6	A2	200	212	55
755 21U.00	221	285,75	10	B5	150	162	50
758 239.00	221	285	8	B5	153	165	50
759 939.00	221	285,8	10	B5	153	165	50
761 64C.00	281	335	10	Ø26 / 1x45°	154	166,5	54



8.0-20 WHEELS

Recommended tyre size 11.00 - 20 , 11.00 R 20 , 11.00- 20 EM

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
801 315.00	281	335	10	A3	142	155	50
801 342.00	281	335	10	A3	148	161	49
801 350.00	281	335	10	A3	132	145	48
801 62Y.00	281	335	10	Ø26 / 1x45°	171	187	54
801 630.00	281	332	10	Ø26 / 1x45°	160	172	48
801 633.00	281	335	10	Ø26 / 1x45°	156	168	47
801 63B.00	281	335	10	Ø26 / 1x45°	118	130	50
801 646.00	281	335	10	Ø26 / 1x45°	161	174	49
801 649.00	281	335	10	Ø26 / 1x45°	174	187	52
801 64B.00	281	335	10	Ø26 / 0,5x45°	152	165	52
801 651.01	281	335	10	Ø26 / 1x45°	164	176	53
801 653.00	281	335	10	Ø26 / 1x45°	162	174	53
801 654.00	281	335	10	Ø26 / 0,5x45°	160	172	50 ***
801 656.00	281	335	10	Ø26 / 1x45°	143	155	49
801 65A.00	281	335	10	Ø26 / 1x45°	0	--	51
801 666.00	281	335	10	Ø26 / 0,5x45°	175	190	52
801 71L.00	281	335	10	B3	134	147	49
801 720.00	281	335	10	B3	0	--	50
801 753.00	281	335	10	B3	162	174	53
801 843.00	281	335	10	Ø26 / 80°	162	175	52
801 859.02	281	335	10	Ø26 / 80°	161	174	52
801 953.00	281	335	10	Ø27 / 2x45°	161,5	173,5	50
801 94P.00	281	335	10	Ø23,5 / 1x45°	147	160	49 ***
801 954.00	281	335	10	Ø26 / R18	162	174	51
801 971.00	281	335	10	Ø25.4 / R18	-13	--	51
802 740.00	221	275	8	B3	0	--	50
802 91N.00	221	271	8	A17	-8,5	--	52
809 21J.00	221,5	285,75	10	B5	165	178	53
809 257.00	221,48	285,75	10	B5	158	170	50
809 306.00	326	380	10	A3	-161	--	60
809 649.00	325	381	12	Ø26 / 1x45°	174	187	51
809 688.00	325	381	12	Ø26 / 0,5x45°	176	190	53
809 91H.00	150	194	8	Ø17 / R14	69	--	68
809 953.00	325	381	12	Ø26 / R18	162	174	48

*** with 20x20 reinforcement ring



8.5-20 WHEELS

Recommended tyre size 12.00 - 20 , 12.00 R 20 , 12.00- 20 EM

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%	
851 357.00	281	335	10	A3	159	171	50	
851 425.00	281	335	10	B17	169	180	50	
851 625.00	281	335	10	Ø26 / 1x45°	169	180	50	
851 628.00	281	335	10	Ø26 / 1x45°	161	172	49	
851 634.00	281	335	10	Ø26 / 1x45°	167	179	52	
851 641.00	281	335	10	Ø26 / 1x45°	166,5	180	54	
851 643.00	281	335	10	Ø26 / 1x45°	162	175	52	
851 645.00	281	335	10	Ø26 / 0,5x45°	164	177	51	
851 646.00	281	335	10	Ø26 / 1x45°	159	172	51	
851 647.00	281	335	10	Ø26 / 1x45°	0	--	51	
851 649.00	281	335	10	Ø26 / 0,5x45°	174,5	187	51	
851 653.00	281	335	10	Ø26 / 1x45°	163	175	50	
851 661.00	281	335	10	Ø26 / 1x45°	161	175	53	
851 662.00	281	335	10	Ø26 / 1x45°	0	--	50	
851 71B.00	281	335	10	B3	173	185	51	***
851 725.00	281	335	10	B3	169	180	51	
851 730.00	281	335	10	B3	162	174	49	
851 743.00	281	335	10	B3	162	175	52	
851 745.00	281	335	10	B3	167	180	54	***
851 91M.00	281	335	10	B3	148	160	51	
851 949.00	281	335	10	B3	175	188	52	
855 260.00	221,4	285,7	10	B5	177	190	56	

10.0-20 WHEELS

Recommended tyre size 14.00 - 20 , 14.00 R 20 , 14.00- 20 EM

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
121 64D.00	281	335	10	Ø26 1x45°	193	206	77


*** with 20x20 reinforcement ring



8.5-24 WHEELS

Recommended tyre size 12.00 - 24 , 12.00 R 24 , 12.00- 24 EM

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
841 388.00	281	335	10	B3	175	189	84
841 63G.00	281	335	10	Ø26 / 1x45°	154	168	84
841 64Z.00	281	335	10	Ø26 / 1x45°	164	180	84
841 663.00	281	335	10	Ø26 / 1x45°	160	174	75
841 664.00	281	335	10	Ø26 / 1x45°	166	180	76
841 764.00	281	335	10	B3	166	180	76
849 388.00	325	381	12	A3	175	189	81
849 666.00	371	425	12	Ø26 / 1x45°	175	190	78
849 764.00	371	425	12	B3	164	180	78

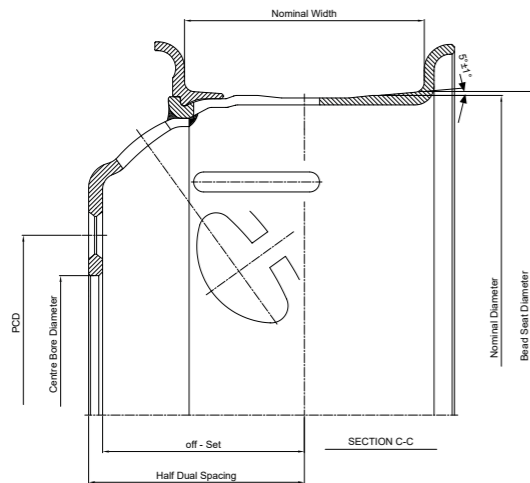

7.5-20 WHEELS

Recommended tyre size 10.00 - 20 , 10.00 R 20 , 10.00- 20 EM


JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
785 93Y.00	221	285,75	10	B5	160,5	171,5	46

8.5-24 WHEELS

Recommended tyre size 12.00 - 24 , 12.00 R 24 , 12.00- 24 EM

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
891 64U.00	281	335	10	Ø26 / 1x45°	160	175	73

- for pneumatic tyres only
- dual discs with and without hand and ventilation holes
- air pressure 9 Bar or 130 PSI

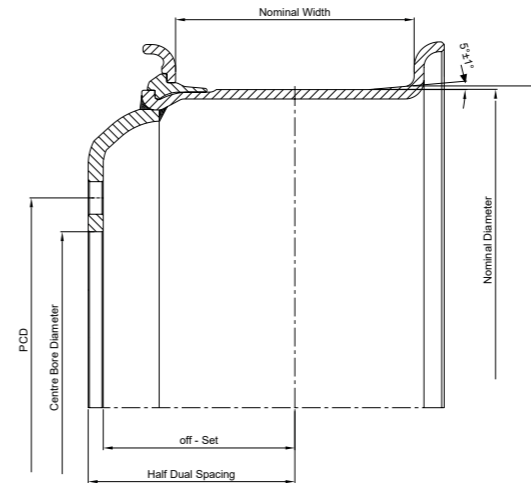

6.5-20 FLAT BASE WHEELS

Recommended tyre size 8.25 - 20 , 8.25 R 20 , 8.25- 20 EM

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
651 435.00	281	335	10	B17	130	142	48
651 621.00	281	335	10	Ø26 / 1x45°	137	148	47
699 940.00	200	254	10	Ø22 / 1x45°	0	--	48

7.5-20 FLAT BASE WHEELS

Recommended tyre size 10.00 - 20 , 10.00 R 20 , 10.00- 20 EM

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
751 673.00	281	335	10	Ø26 / 1x45°	151	165	51
758 255.00	221	285	8	B5	153	165	51

8.0-20 FLAT BASE WHEELS

Recommended tyre size 11.00 - 20 , 11.00 R 20 , 11.00- 20 EM


JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
805 93M.00	220	335	10	Ø26 / 1x45°	155	168	55

8.5-20 FLAT BASE WHEELS

Recommended tyre size 12.00 - 20 , 12.00 R 20 , 12.00- 20 EM

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
851 42P.00	281	335	10	B17	169	182	54

- for solid tyres only

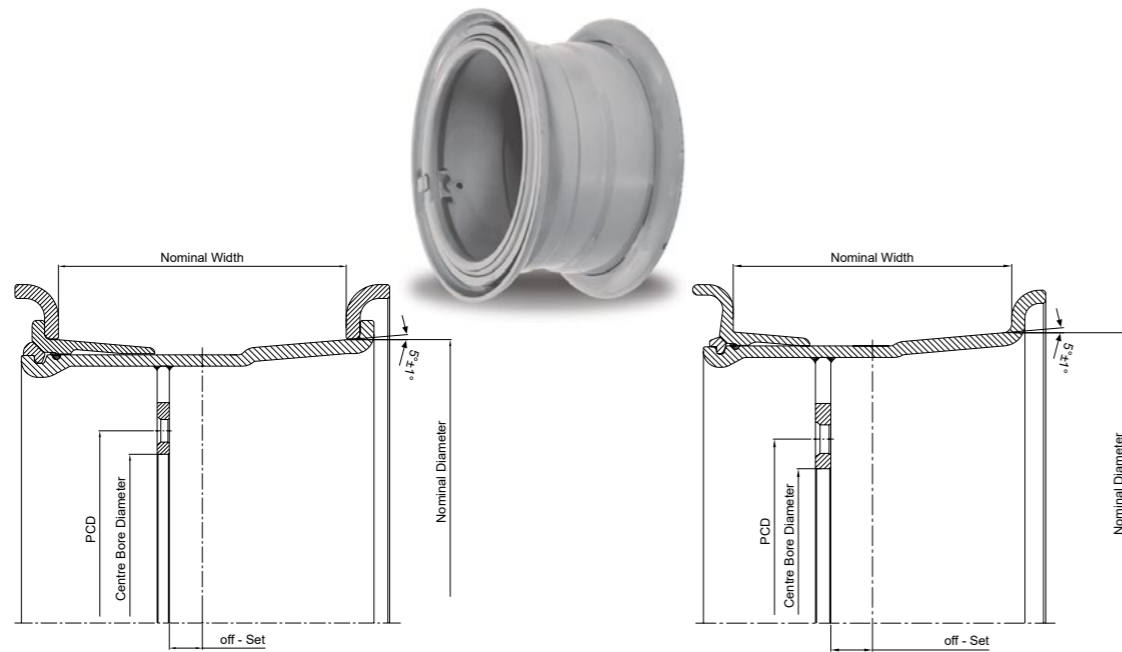


25" 3 P WHEELS

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
9.50-25 WHEELS Recommended tyre size 14 R 25							
259 500.300	Ø281	Ø335	10	Ø26 / 1x45°	80	--	--
10.00-25 WHEELS Recommended tyre size 14 R 25							
251 000.300	Ø281	Ø335	10	Ø26 / 1x45°	80	--	--
11.00-25 WHEELS Recommended tyre size 16 R 25							
251 100.300	Ø281	Ø335	10	Ø26 / 1x45°	75	--	--
14.00-25 WHEELS Recommended tyre size 17.5 R 25							
251 400.303	Ø350	Ø400	16	A3	32	--	--
17.00-25 WHEELS Recommended tyre size 20.5 R 25							
251 700.302	Ø282	Ø335	10	B3	79	--	--

25" 5 P WHEELS


JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
11.25-25 WHEELS Recommended tyre size 16 R 25							
251 125.501	Ø371	Ø425	12	Ø26 / 1x45°	50	--	--
13.00-25 WHEELS Recommended tyre size 18 R 25							
251 300.500	Ø281	Ø335	10	Ø26 / 1x45°	30	--	--
19.5-25 WHEELS Recommended tyre size 23.5 R 25							
251 950.501	Ø371	Ø425	12	Ø26 / 1x45°	80	--	--
20.0-25 WHEELS Recommended tyre size 25/65 R 25							
252 200.501	Ø350	Ø400	16	Ø22 / 1x45°	0	--	--
22.0-25 WHEELS Recommended tyre size 26.5 R 25							
252 200.501	Ø371	Ø425	12	Ø26 / 1x45°	90	--	--
25.0-25 WHEELS Recommended tyre size 29.5 R 25							
252 500.500	Ø448.2	Ø500	18	Ø24.5 / 15x45°	21	--	--

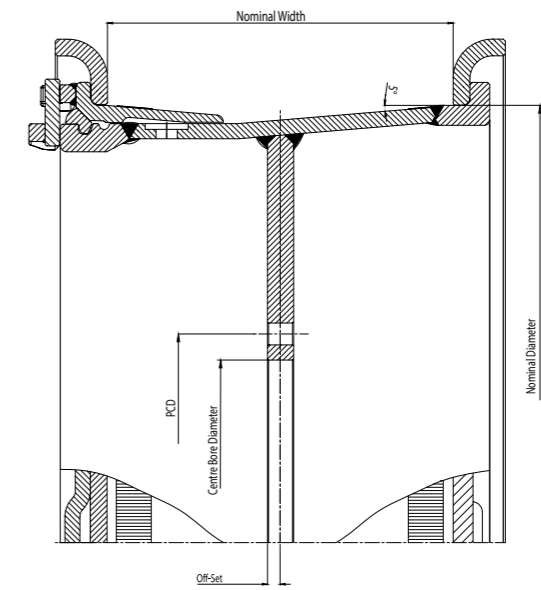

13.00-33 WHEELS

Recommended Tyre Size 18.00 R 33


JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
269 900.16	350	400	16	Ø21	13	--	--
269 900.21	449	500	24	626	75	--	--

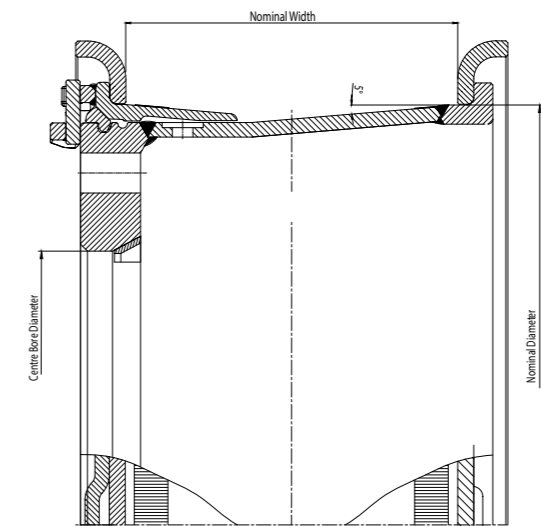

13.00-33 CLAMP FITTING WHEELS

Recommended Tyre Size 18.00 R 33

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
269 900.03	546,5	--	--	--	--	--	--
269 900.32	542	--	--	--	--	--	--

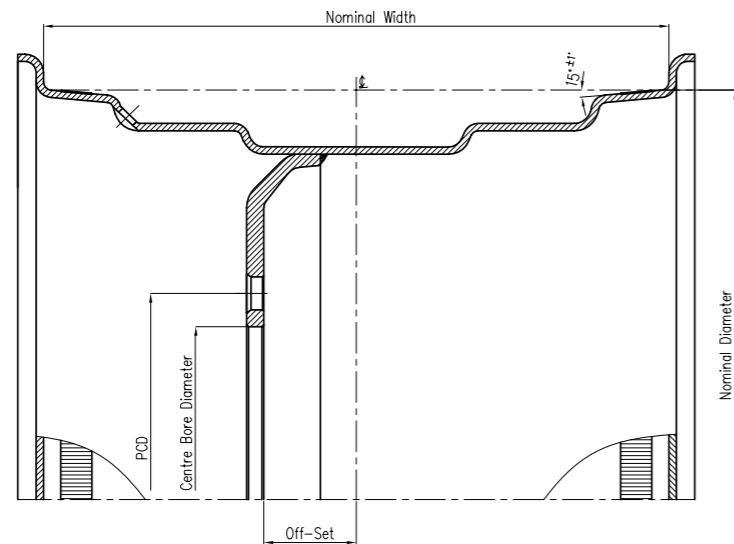

22.5x14.00 WHEELS

Recommended Tyre Size 415/45 R22.5, 445/50 R22.5, 445/55 R22.5, 455/55 R22.5

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
951 6JT.00	281	335	10	Ø26/1x45°	154	--	--
951 647.00	281	335	10	Ø26/1x45°	0	--	--

22.5x16.00 WHEELS

Recommended Tyre Size 500/45 R22.5, 500/60 R22.5, 520/55 R22.5, 560/60 R22.5, 560/45 R22.5, 580/65 R22.5

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
931 3KV.00	281	335	10	Ø27/Ø32/R18	50	--	--
931 6LM.00	281	335	10	Ø26/1x45°	85	--	--
932 940.00	221	275	8	Ø21.5/3x45°	0	--	--

22.5x20 WHEELS

Recommended Tyre Size 650/45 R22.5, 600/50 R22.5, 620/50 R22.5, 650/40 R22.5, 650/50 R22.5

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
941 7AA.00	281	335	10	Ø27/Ø32/R18	-50	--	--
942 340.00	221	275	8	Ø27/Ø32/R18	0	--	--

22.5x22 WHEELS


Recommended Tyre Size 710/40 R22.5, 710/45 R22.5, 680/50 R22.5

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
2N1 3VN.00	281	335	10	Ø27/Ø32/R18	-40	--	--

22.5x24 WHEELS

Recommended Tyre Size 750/45 R22.5

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
961 7LJ.00	281	335	10	Ø27/Ø32/R18	-50	--	--
961 747.00	281	335	10	Ø27/Ø32/R18	0	--	--

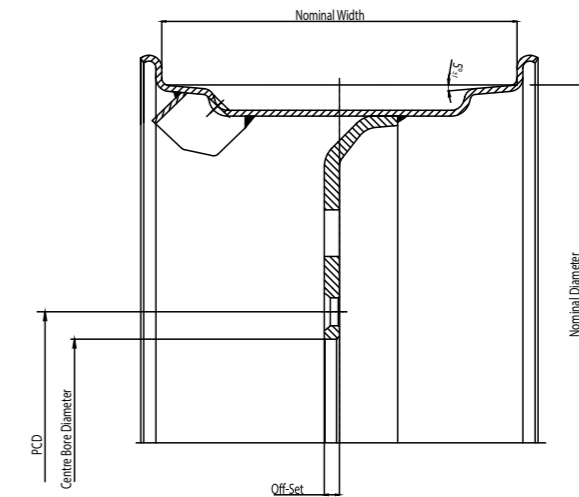

20x11.0 WHEELS

Recommended Tyre Size 340/65 R20, 360/70 R20, 340/80 R20, 360/80 R20

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
092 9ST.00	221	275	8	Ø24/1x45°	52	--	35.1
099 9EL.00	292	335	6	Ø24/Ø38/R22.4	-4	--	--
099 99J.00	170.26	225	10	Ø15.88/1x45°	25	--	--
099 9FN.00	170.4	225	10	Ø15/1x45°	54	--	40
099 9EB.00	221.5	275	8	Ø19/1x45°	29	--	--

20x13.0 WHEELS

Recommended Tyre Size 420/65 R20, 400/70 R20

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
1C9 9R8.00	220.5	275	8	Ø22/1x45°	34	--	--
1C2 3KZ.00	221	275	8	Ø27/Ø32/R18	32	--	--
1C9 9EL.01	292	335	6	Ø24/Ø38/R22.4	-4	--	--
1C9 9CS.00	281.5	335	10	Ø25.5/Ø38/R22.4	-10	--	--
1C2 9CS.00	221.5	275	8	Ø25.5/Ø38/R22.4	-10	--	--

24xW10.0 WHEELS

Recommended Tyre Size 300/80 R24, 340/80 R24, 360/80 R24

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
1K2 9MS.00	222	275	8	Ø22/Ø32/R18	5	--	49.2
1K2 9MS.01	222	275	8	Ø22/Ø32/R18	5	--	49.2

24xW11.0 WHEELS

Recommended Tyre Size 300/80 R24, 320/80 R24, 340/80 R24, 360/80 R24

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
1G2 3JF.00	221	275	8	Ø27/Ø32/R18	90	--	--
1G2 3JF.01	221	275	8	Ø27/Ø32/R18	90	--	--

24xW12.0 WHEELS

Recommended Tyre Size 360/80 R24, 400/80 R24, 420/65 R24

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
1H9 947.00	178	225	10	Ø24/Ø32/R18	0	--	51.6
1H9 947.01	178	225	10	Ø24/Ø32/R18	0	--	51.6
1H9 9TC.00	220.2	255	12	Ø17/1x45°	-71	--	51.5
1H9 9TP.00	175.5	225	10	Ø24/1x45°	127	--	--

24xW15.0 WHEELS

Recommended Tyre Size 460/65 R24, 440/80 R24, 480/80 R24

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
1S1 920.00	281	335	10	Ø23/0.5x45°	0	--	--
1S2 3VB.00	221	275	8	Ø27/Ø32/R18	20	--	56.2

26xW15.00 WHEELS


Recommended Tyre Size 460/85 R24, 480/80 R24

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
1N9 9CM.00	281.5	335	10	Ø25.5/Ø38/R22.4	-57.5	--	--
1N9 9CM.01	281.5	335	10	Ø25.5/Ø38/R22.4	-57.5	--	--
1N9 9CM.02	281.5	335	10	Ø25.5/Ø38/R22.4	-57.5	--	--

28xW14.0 WHEELS

Recommended Tyre Size 440/65 R28

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
1W1 3HB.00	281	335	10	Ø27/Ø32/R18	-1.3	--	--
1W1 3LE.00	281	335	10	Ø27/Ø32/R18	-36.3	--	--
1W1 9VU.00	281	335	10	Ø23/Ø27.7/R16	-55.5	--	--
1W9 9CM.00	281.5	335	10	Ø25.5/Ø38/R22.4	-57.5	--	--
1W9 9LB.00	281.5	335	10	Ø22.5/1x45°	-46.6	--	--

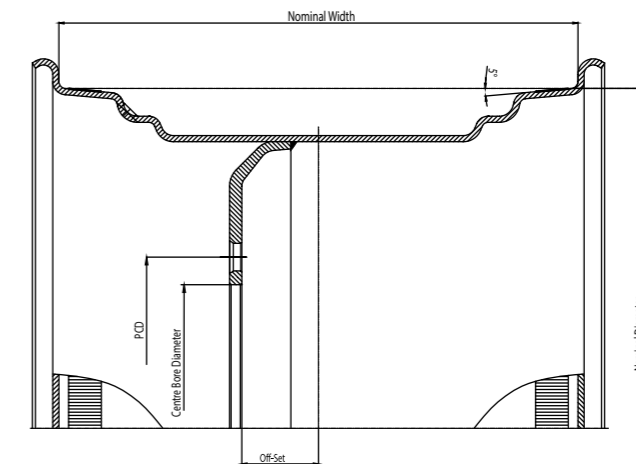

26xDW20 WHEELS

Recommended Tyre Size 620/70 R26, 650/70 R26, 620/75 R26

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
281 3BE.00	281	335	10	Ø27/Ø32/R18	75	--	--
281 3BE.01	281	335	10	Ø27/Ø32/R18	75	--	--
281 3CE.00	281	335	10	Ø27/Ø32/R18	30	--	--
281 3NG.00	281	335	10	Ø27/Ø32/R18	-9.5	--	--
289 92V.00	281	330	18	Ø18/1x45°	-31.5	--	--

26xDW25 WHEELS


Recommended Tyre Size 620/70 R26, 650/70 R26, 620/75 R26

JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
291 3SF.00	281	335	10	Ø27/Ø32/R18	-100	--	--
291 5AF.00	281.8	335	10	Ø27/Ø32/R18	-17	--	--
291 5AF.02	281.8	335	10	Ø27/Ø32/R18	-17	--	--
299 3FF.00	371	425	12	Ø27/Ø32/R18	20	--	--
299 5AF.00	361	400	16	Ø21/1x45°	-17	--	--

26.5xDW20 WHEELS

Recommended Tyre Size 650/65 R26, 600/55 R26, 620/60 R26


JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
271 7LJ.00	281	335	10	Ø27/Ø32/R18	-50	--	--
271 747.00	281	335	10	Ø27/Ø32/R18	0	--	--
271 647.00	281	335	10	Ø26/1x45°	0	--	--
271 347.00	281	335	10	Ø27/Ø32/R18	0	--	--
271 347.01	281	335	10	Ø27/Ø32/R18	0	--	--

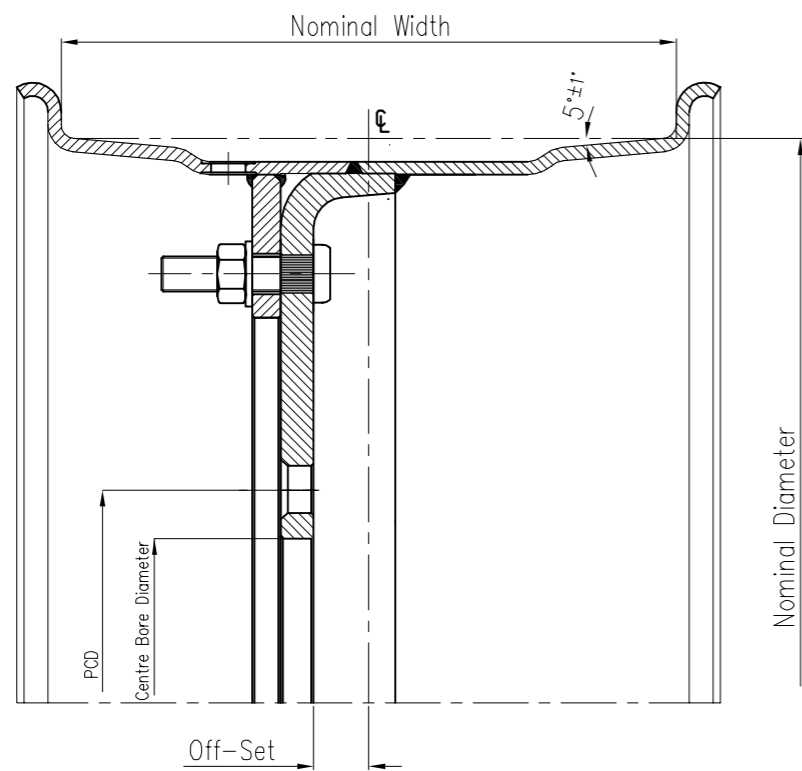

11.00x20 BOLT TOGETHER WHEELS

Recommended tyre size 335/80 R 20 , 365/80 R 20


JMS Part nr.	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Half Dual Spacing	Weight (kg) ±5%
099 9BT.00	Ø161	Ø205	6	Ø21.3/Ø32/R16	25	--	--

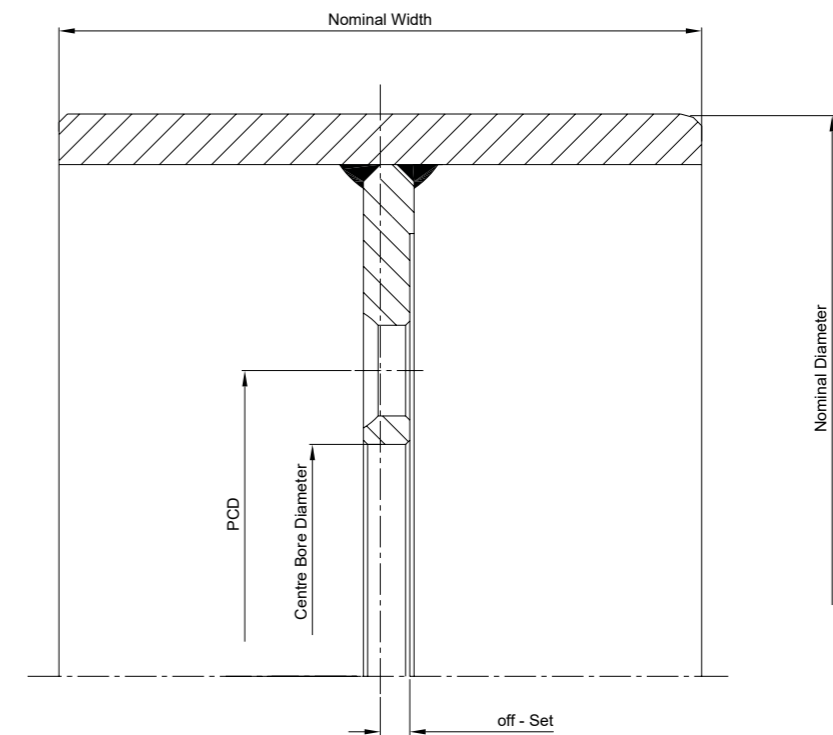

JMS Part nr.	Size	Centre Bore Diameter (mm)	PCD (mm)	N° of Stud Holes	Type of Stud Holes	Offset (mm)	Weight (kg) ±5%
059 91C.00	8.00x16	145,1	180	14	Ø16 / 1x45°	72	36
069 940.00	10.5x6	110	145	5	A2	-7	15
139 94Y.00	16x30	270	305	12	Ø18 / 1x45°	0	320

• for solid tyres only

JMS Part nr.	Rim Size	Type	Tyre Size	Weight (kg) ±5%
679 000.00	17.5 x 6.0	Tubeless	8 R 17.5 , 8.5 R 17.5 , 205/75R17.5 , 215/75R17.5	13,6
689 000.00	17.5 x 6.75	Tubeless	9.5 R 17.5 , 225/70R17.5 , 225/75R17.5 , 235/75R17.5	15
799 000.00	19.5 x 7.5	Tubeless	9.5R19.5 , 10R19.5 , 11R19.5 , 245/70R19.5 , 265/70R19.5	18
779 000.00	22.5 x 7.5	Tubeless	10 R 22.5 , 255/70R22.5	21
829 000.00	22.5 x 8.25	Tubeless	11 R 22.5 , 265/60R22.5 , 275/70R22.5 , 285/70R22.5 , 275/80R22.5	26
929 000.00	22.5 x 9.0	Tubeless	12R22.5 , 285/60R22.5 , 295/60R22.5 , 305/70R22.5 , 315/70R22.5, 315/75R22.5, 295/80R22.5, 315/80R22.5	28
179 000.00	22.5 x 11.75	Tubeless	355/50R22.5 - 385/65R22.5	35
185 000.00	18.0 TL 21	Tubeless	24R21	45
604 000.00	6.0 - 20	4pcs. HD	7.50 - 20 , 7.50 R 20 , 7.50 - 20 EM	29
654 000.00	6.5 - 20	4pcs. HD	8.25 - 20 , 8.25 R 20 , 8.25- 20 EM	33
704 000.00	7.0 - 20	4pcs. HD	9.00 - 20 , 9.00 R 20 , 9.00- 20 EM	37
754 000.00	7.5 - 20	4pcs. HD	10.00 - 20 , 10.00 R 20 , 10.00- 20 EM	40
804 000.00	8.0 - 20	4pcs. HD	11.00 - 20 , 11.00 R 20 , 11.00- 20 EM	44
854 00H.00	8.5 - 20	4pcs. HD	12.00 - 20 , 12.00 R 20 , 12.00- 20 EM	48
104 0HH.00	10.0 - 20	4pcs. HD	14.00 - 20 , 14.00 R 20 , 14.00- 20 EM	70
844 00H.00	8.5 - 24	4pcs. HD	12.00 - 24 , 12.00 R 24 , 12.00- 24 EM	71
144 00H.00	10.0 - 24	4pcs. HD	14.00 - 24 , 14.00 R 24 , 14.00- 24 EM	85
602 000.00	6.0 - 20	3pcs.	7.50 - 20 , 7.50 R 20 , 7.50 - 20 EM	18
652 000.00	6.5 - 20	3pcs.	8.25 - 20 , 8.25 R 20 , 8.25- 20 EM	22
702 000.00	7.0 - 20	3pcs.	9.00 - 20 , 9.00 R 20 , 9.00- 20 EM	26
752 000.00	7.5 - 20	3pcs.	10.00 - 20 , 10.00 R 20 , 10.00- 20 EM	29
802 000.00	8.0 - 20	3pcs.	11.00 - 20 , 11.00 R 20 , 11.00- 20 EM	33
852 000.00	8.5 - 20	3pcs.	12.00 - 20 , 12.00 R 20 , 12.00- 20 EM	37
842 000.00	8.5 - 24	3pcs.	12.00 - 24 , 12.00 R 24 , 12.00- 24 EM	51
75G 000.00	7.5 - 20	2pcs.	10.00 - 20 , 10.00 R 20 , 10.00- 20 EM	29
84C 000.00	8.5 - 24	2pcs.	12.00 - 24 , 12.00 R 24 , 12.00- 24 EM	51
65A 000.00	6.5 - 20	3pcs. FLAT	8.25 - 20 , 8.25 R 20 , 8.25- 20 EM	24
70A 000.00	7.0 - 20	3pcs. FLAT	9.00 - 20 , 9.00 R 20 , 9.00- 20 EM	28
75A 000.00	7.5 - 20	3pcs. FLAT	10.00 - 20 , 10.00 R 20 , 10.00- 20 EM	31
80A 000.00	8.0 - 20	3pcs. FLAT	11.00 - 20 , 11.00 R 20 , 11.00- 20 EM	35
85A 000.00	8.5 - 20	3pcs. FLAT	12.00 - 20 , 12.00 R 20 , 12.00- 20 EM	39
84A 000.00	8.5 - 24	3pcs. FLAT	12.00 - 24 , 12.00 R 24 , 12.00- 24 EM	53
135 000.R1	8.0 V 20	FLAT BASE	11.00 - 20 , 11.00 R 20 , 11.00- 20 EM	39
155 000.R1	8.5 V 20	FLAT BASE	12.00 - 20 , 12.00 R 20 , 12.00- 20 EM	40
165 000.R1	9.0 V 20	FLAT BASE	12.00 - 20 , 12.00 R 20 , 12.00- 20 EM , 14.00 - 20 , 14.00 R 20 , 14.00- 20 EM	41
115 000.R1	10.0 V 20	FLAT BASE	14.00 - 20 , 14.00 R 20 , 14.00- 20 EM	43
25D 000.00	11.25 - 25	5pcs.	16 - 24 , 16 - 25 , 16 R 24 , 16 R 25 , 445/95R25	161,5
25E 000.00	13.0 - 25	5pcs.	18 - 25 , 18 R 25 , 505/95R25, 405/80R25	176
25F 000.00	17.0 - 25	5pcs.	20.5 - 25 , 550/65R25 , 555/70R25 , 525/80R25	164,5

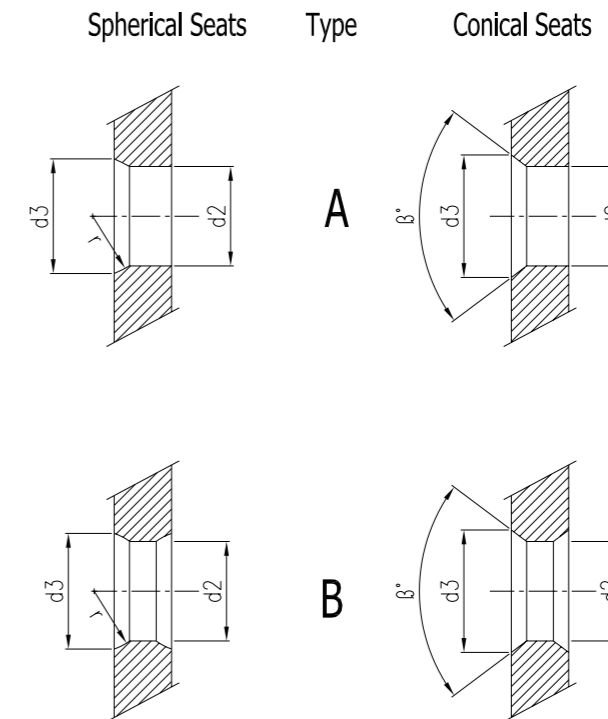

n°	d2	d3	r
15	16	22	90°
17	25,4	31,5	80°
21	21,5	27	90°
42	30	38,5	80°
43	32,15	44	90°
44	22,5	30	90°
45	20,5	27	90°
49	23,5	30	90°
80	17	27	90°
81	18	24	90°
83	21,5	29,5	90°
84	23,5	27,5	90°
86	32	39	90°

n°	d2	d3	r
2	21,5	27	16
3	27	32	18
5	32,15	37	22,2
7	15,5	24	14
51	20,5	27	16
52	23,5	32	18
53	30	38,5	22,2
54	32,15	38,5	25
56	21,5	28	18
57	21,5	28	16

JMS

MACHINERY INDUSTRY AND TRADE INC.
Organize Sanayi Bölgesi 4. Cadde 26110 ESKİŞEHİR / TURKEY
Tel: +90.222.236 00 36 Fax: +90.222.236 00 37
web: www.jamak.com.tr - www.jmsmachinery.com
e-mail: jamak@jamak.com.tr

İstanbul Grafik
0 222 231 10 66

 **JAMAK**